

Model: **ZX-BG5KW-A5**

Rated Voltage:51.2V
Rated Capacity:100Ah
Rated Energy:5120Wh
Voltage Range:44.8-56V
Charge Voltage Range:56-57.6V
Cut-off Voltage:44.8V
Recommend Charge Current:50A
Max Charge Current:100A
Max Discharge Current:100A

DimensionL*W*H:460*164*612mm
Weight:≈49.3kg
Communication Port:RS485、CAN
Display:LED+LCD
Terminal:Plug-in
Cycle Life:>6000 (0.5C@25°C,80%DOD)
Compatible inverter:Growatt,Goodwe,Sol-Ark,SRNE,DEYE
Certificate:CE,FCC,RoHs,MSDS,UN38.3



Model:

ZX-BG10KW-A2

Rated Voltage:51.2V

Rated Capacity:200Ah

Rated Energy:10240Wh

Voltage Range:44.8-56V

Charge Voltage Range:56-57.6V

Cut-off Voltage:44.8V

Recommend Charge Current:100A

Max Charge Current:200A

Max Discharge Current:200A

DimensionL*W*H:430*164*960mm

Weight:≈85.9kg

Communication Port:RS485、CAN


Display:LED+LCD

Terminal:Plug-in

Cycle Life:>6000 (0.5C@25°C,80%DOD)

Compatible inverter:Growatt,Goodwe,Sol-Ark,SRNE,DEYE

Certificate:CE,FCC,RoHs,MSDS,UN38.3

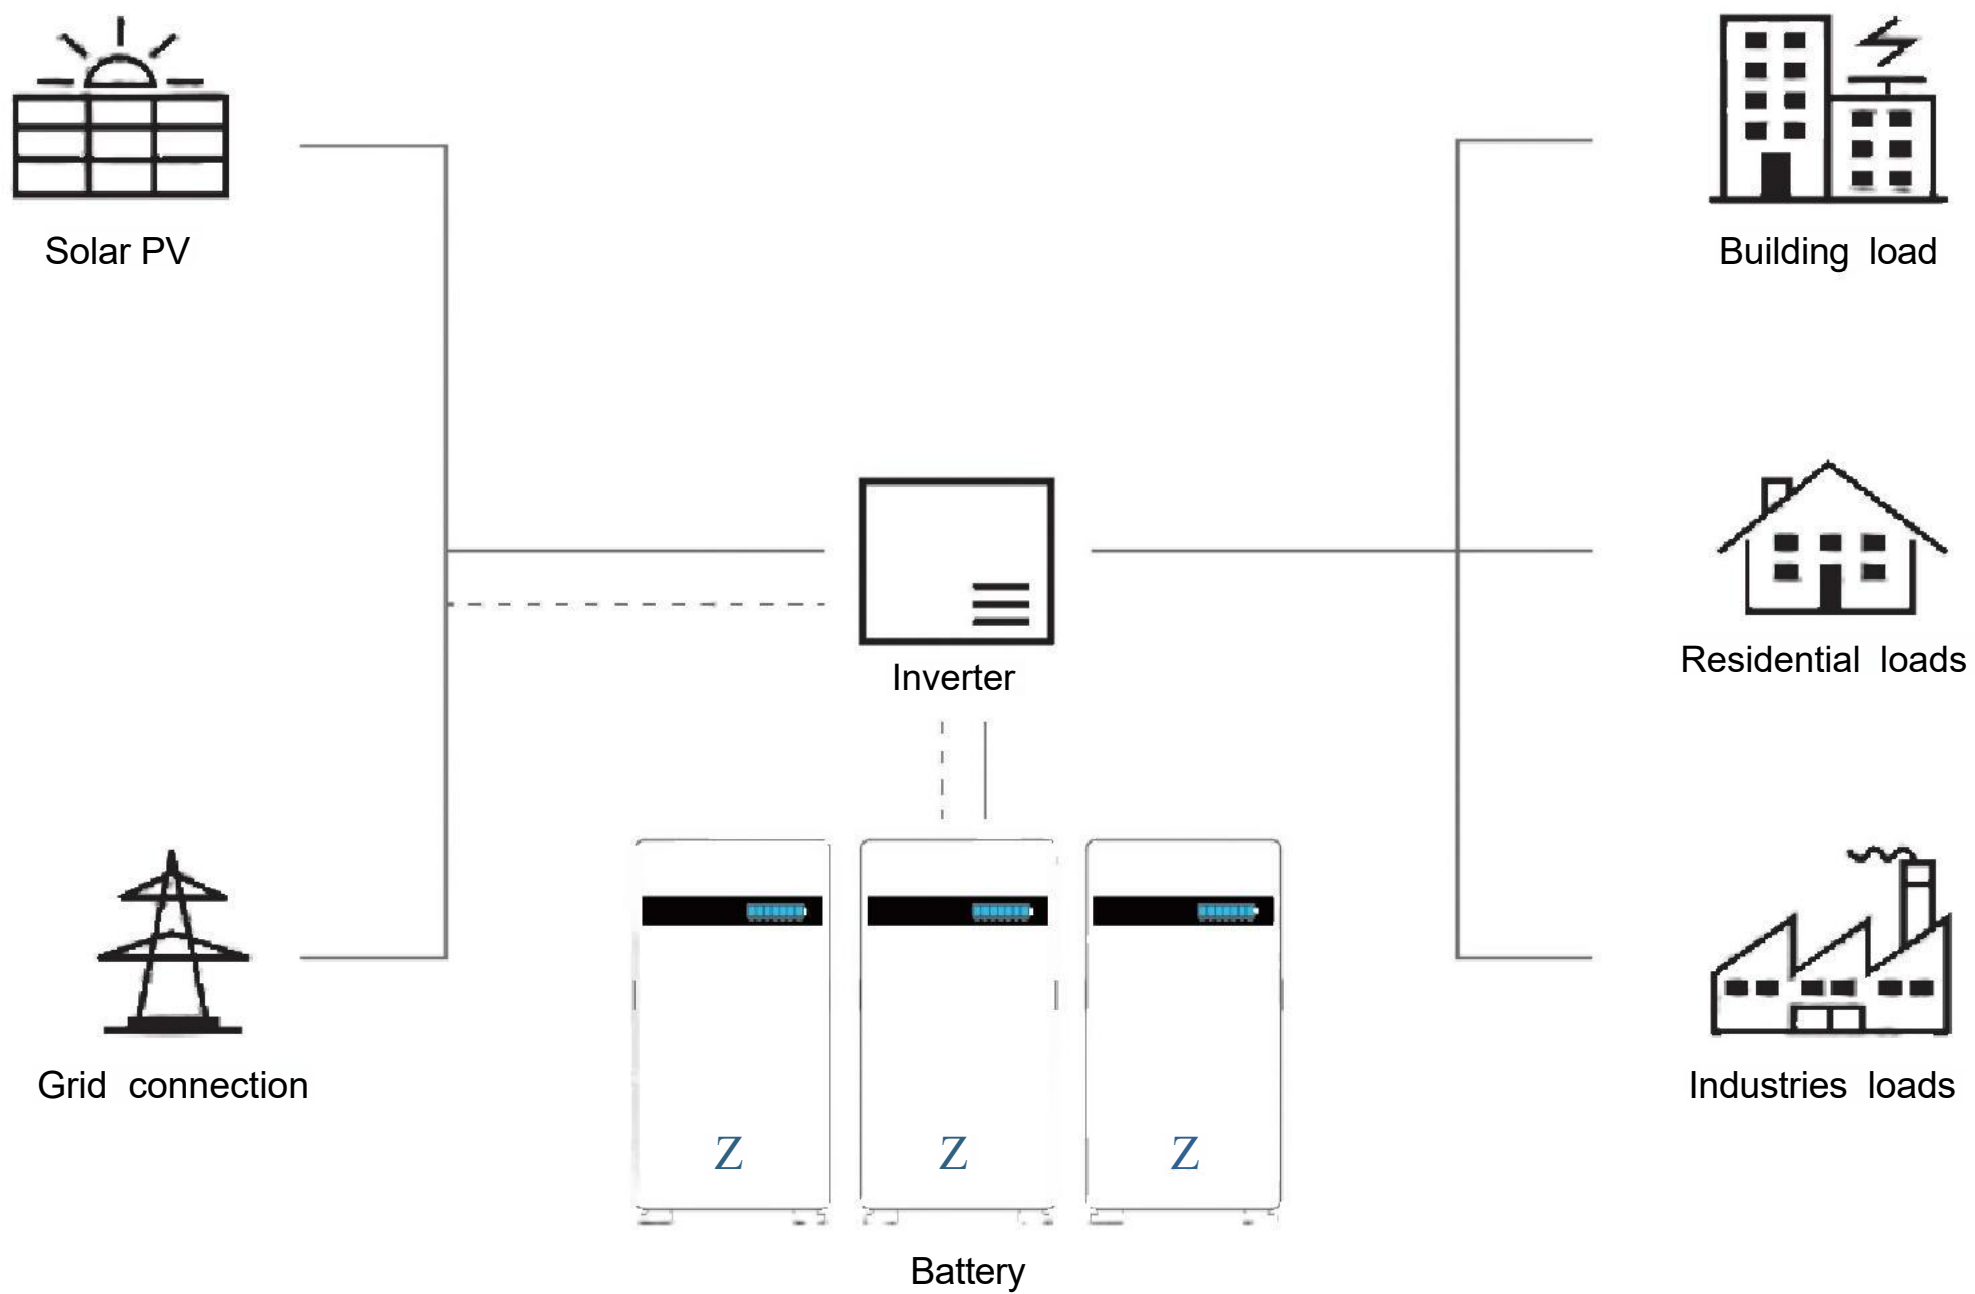

Model:

ZX-LD15KW-A3

Rated Voltage:51.2V

Rated Capacity:280Ah

Rated Energy:14336Wh

Voltage Range:44.8-56V

Charge Voltage Range:56-57.6V

Cut-off Voltage:44.8V

Recommend Charge Current:100A

Max Charge Current:200A

Max Discharge Current:200A

DimensionL*W*H:500*230*780(Without base)

Weight:≈117.5kg

Communication Port:RS485、CAN


Display:LED+LCD

Terminal:Plug-in

Cycle Life:>6000 (0.5C@25°C,80%DOD)

Compatible inverter:Growatt,Goodwe,Sol-Ark,SRNE,DEYE

Certificate:CE,FCC,RoHs,MSDS,UN38.3

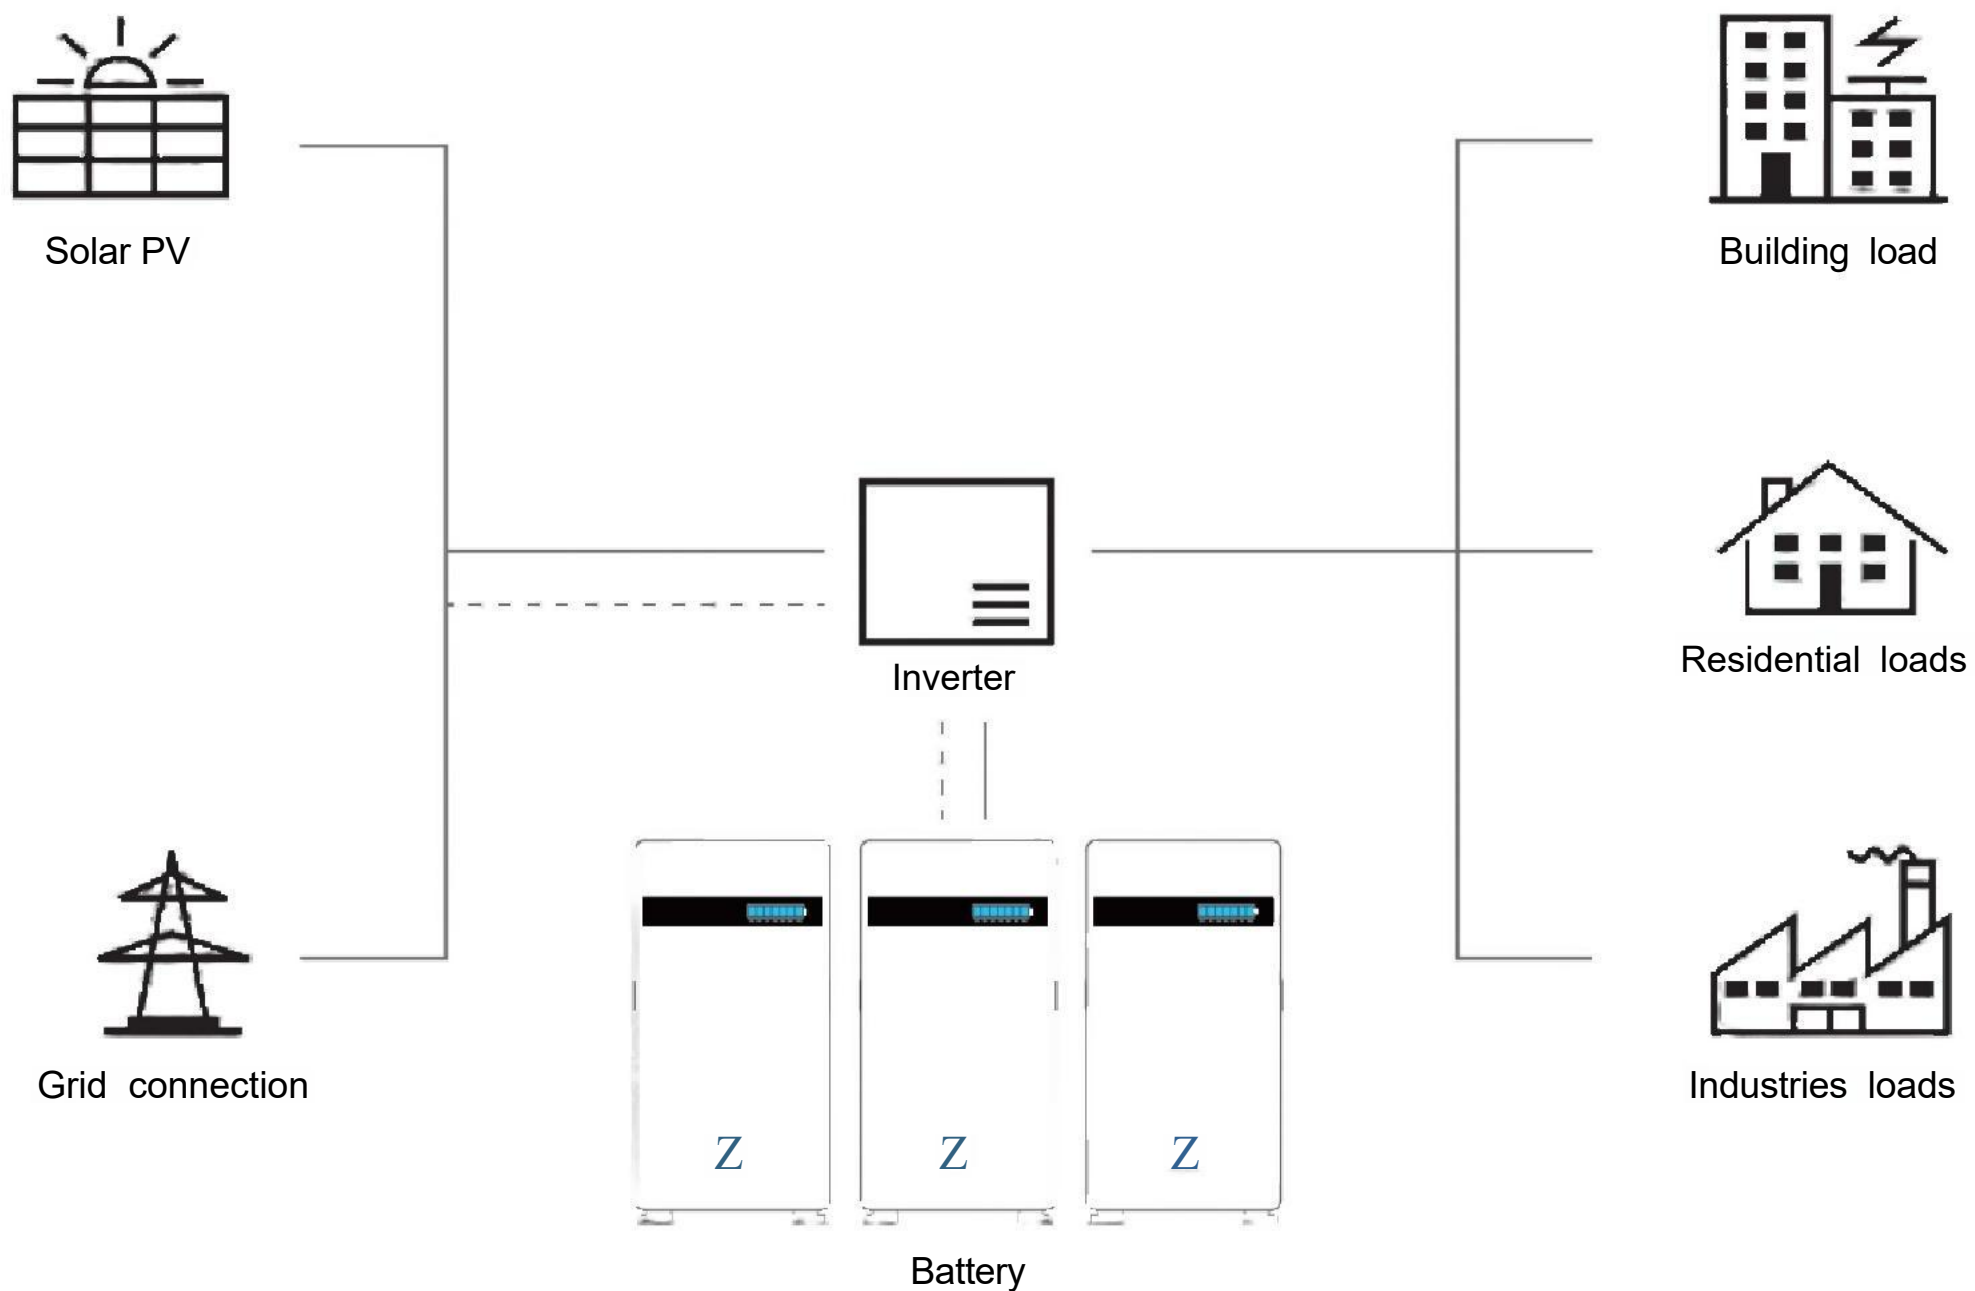

Model:

ZX-LD15KW-A2

Rated Voltage:51.2V
 Rated Capacity:280Ah
 Rated Energy:14336Wh
 Voltage Range:44.8-56V
 Charge Voltage Range:56-57.6V
 Cut-off Voltage:44.8V
 Recommend Charge Current:100A
 Max Charge Current:200A
 Max Discharge Current:200A

DimensionL*W*H:500*233*810(Without base)
 Weight:≈117.5kg
 Communication Port:RS485、CAN
 Display:LED+LCD
 Terminal:Plug-in
 Cycle Life:>6000 (0.5C@25°C,80%DOD)
 Compatible inverter:Growatt,Goodwe,Sol-Ark,SRNE,DEYE
 Certificate:CE,FCC,RoHs,MSDS,UN38.3

